



LAUNDRY **SOLUTIONS**
YOU CAN **DEPEND** ON.

MAYTAG® COMMERCIAL ENERGY ADVANTAGE™ SOFT-MOUNT FRONT-LOAD WASHERS

FASTER CUSTOMER TURNAROUND. LOWER ENERGY BILLS.

By extracting water at high speeds, laundry goes into the dryer—drier. This saves customers time and it cuts your energy costs, too. Better yet, installation is easy. The soft-mount suspension system eliminates the need for machine bolt-down, so no special floor depth is required.

MAYTAG® TURBOWASH™ SYSTEM

Specially designed spray baffles and tumble patterns provide more cleaning power while using less water, cutting costs and maximizing your profits.

FOR YOUR CUSTOMERS:

- Big-Load Design With Oversized Door Opening
- Easy-To-Use One-Touch Cycle Selection
- Display Shows Time Remaining
- Enhanced Super Cycle Options Increase Revenue

FOR YOUR OPERATION:

- Inverter Drive Technology For Better Efficiency And Longer Life
- Microprocessor Coin-Drop Helps Prevent Slugging
- Accu Trac® Audit System With Two-Way Data Communication
- Debit Card Compatibility
- Self-Diagnostic Feature Cuts Service Costs And Minimizes Downtime
- Easy Service Access
- Programmable LCD Digital Display In English, Spanish Or French

BUILT-TO-LAST® FEATURES:

- Extra-Large 3" Drain Valve
- Commercial-Duty Door Handle, Belts And Frame
- Reliable Die-Cast Door Lock Assembly
- Durable Sealed Bearings
- Stainless Steel Top, Front And Sides
- The Best Warranty In The Business

MFS18/25PD





**HIGH SPIN SPEED
REDUCES DRY TIMES AND
OVERALL CYCLE TIME.**

Model MFS18PD shown.

Maytag® Energy Advantage™ Soft-Mount Washer Extractors

MICROPROCESSOR COIN-DROP

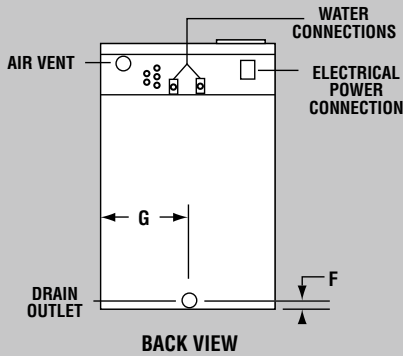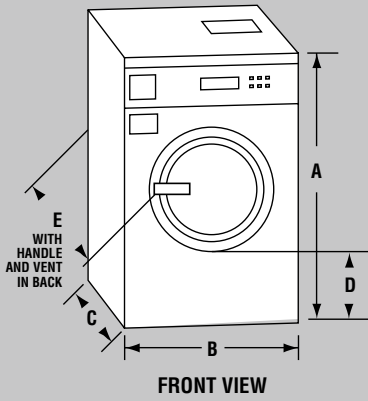

Available In 18 And 25 Pound Capacities



**THE BEST WARRANTY
IN THE BUSINESS —
5 YEARS ON ALL PARTS.**

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.



		Energy Advantage™ Soft-Mount Washer Extractors	
WASHER SPECIFICATIONS			
MODELS		MFS18PD	MFS25PD
MOTOR			
Inverter drive		•	•
Variable speed		•	•
HP (kw)		.80 (.75)	2 (1.5)
Voltage		208 - 240V Single-Phase/Three Phase	208 - 240V Single-Phase/Three Phase
BREAKER SIZE - AMPS			
		15	15
SPEED			
Wash speed — rpm		48	48
Extract speed — maximum rpm		1000	1000
Extract speed — maximum g-force		300	300
LIQUID SOAP SIGNALS			
		8	8
WATER INLET/HOSE			
Water inlet — in. (mm)		.75 (19)	.75 (19)
Operating pressure — psi (mpa)		14.5 – 116 (0.1 – 0.8)	14.5 – 116 (0.1 – 0.8)
Drain size — in. (mm)		3.0 (76) O.D.	3.0 (76) O.D.
CAPACITY			
Lbs. (kg)		18 (7)	25 (10)
Cylinder volume — cu. ft. (liters)		2.61 (73.9)	3.3 (93)
Cylinder diameter — in. (mm)		20.86 (530)	20.86 (530)
Cylinder depth — in. (mm)		12.99 (330)	16.53 (420)
COLOR			
Stainless Steel		•	•
APPROXIMATE WEIGHT			
Crated — lbs. (kg)		552 (250)	662 (300)
Uncrated — lbs. (kg)		519 (235)	607 (275)
DIMENSIONS			
A) Height — in. (mm)		42.12 (1070)	44.48 (1130)
B) Width — in. (mm)		25.98 (660)	25.98 (660)
C) Depth — in. (mm)		27 (686)	30.91 (785)
D) Floor to bottom of door — in. (mm)		15.54 (420)	18.9 (480)
E) Depth including handle and vent on back — in. (mm)		30.31 (770)	34.05 (865)
F) Floor to drain outlet center — in. (mm)		3.07 (78)	3.07 (78)
G) Side to drain outlet center — in. (mm)		14.76 (375)	14.76 (375)
Door opening — in. (cm)		11.22 (285)	11.22 (285)
See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.			

NEW YORK CITY
M.E.A.

