

# MDE/MDG17MN

MAYTAG® COMMERCIAL  
SUPER-CAPACITY DRYER



## LEGENDARY MAYTAG DEPENDABILITY

Maximizing your equipment investment for over a half century.



### FOR YOUR OPERATION:

- Turbo Vent™ — Better Performance On Long Vents
- Extra-Large 7.4 cu. ft. Capacity
- Easy-To-Operate Dial Controls
- High Air Flow For Better Clothes Care
- Front Access For Easier Self Service
- Large-Capacity Metal Mesh Lint Filter
- Machine In Use Light

### BUILT-TO-LAST™ FEATURES:

- Premium Porcelain-Enamel Top
- Four Roller Suspension With Permanently Lubricated Bearings
- Blower Guard Reduces Service Calls
- Reliable Electro-Mechanical Controls
- Best Warranty in the Business

FASTER DRYING  
WITH  
**TURBOVENT™**

LAUNDRY SOLUTIONS  
YOU CAN *DEPEND* ON.

CLP808



## OUR COMMITMENT TO DEPENDABLE QUALITY

At Maytag, we believe durable goods should remain just that. That's why every Maytag® product is constructed of the highest-quality materials and with the utmost in precision craftsmanship. It's also why we stand behind our equipment with solid service and support from our professional Maytag laundry suppliers. Simply put, when you choose Maytag® products, you ensure your peace of mind.

www.maytagcommerciallaundry.com




## MDE/MDG17MN MAYTAG® COMMERCIAL SUPER-CAPACITY DRYER

### Maytag® Super-Capacity Dryer

#### MECHANICAL NON-COIN

| DRYER SPECIFICATIONS                                       |                    |
|--|--------------------|
| <b>MODEL</b>   | <b>MDE/MDG17MN</b> |
| <b>MOTOR</b>   |                    |
| Single-phase, thermoprotected against overload, auto-reset | •                  |
| HP (kw)  | 1/3 (.25)          |
| <b>CAPACITY</b>  |                    |
| Cu. ft. (liters)   | 7.4 (209.5)        |
| <b>AIRFLOW</b>   |                    |
| Gas models — cfm (cmm)                                     | 230 (6.5)          |
| Electric models — cfm (cmm)                                | 215 (6.1)          |
| <b>TUMBLE SPEED</b>  |                    |
| RPM  | 51.5 ± 3           |
| <b>ELECTRICAL REQUIREMENTS</b>                             |                    |
| MDE model — voltage  | 240V/60Hz          |
| MDG model — voltage  | 120V/60Hz          |
| Export models — voltage                                    | 220-240V/50Hz      |
| <b>BREAKER/FUSE REQUIREMENTS</b>                           |                    |
| MDE model — amps   | 30                 |
| MDG model — amps   | 15                 |
| MDE export model — amps                                    | 20                 |
| MDG export model — amps                                    | 10                 |
| <b>APPROXIMATE OVERALL DRAW</b>                            |                    |
| Domestic models — watts                                    | 6,000              |
| Export models — watts                                      | 5,000              |
| <b>EXHAUST DUCT DIAMETER</b>                               |                    |
| In. (mm)   | 4 (101.6)          |
| <b>ELECTRONIC BURNER IGNITION</b>                          |                    |
| MDG models   | •                  |
| <b>GAS RATING</b>  |                    |
| MDG model — BTU/hr. (kcal/hr.)                             | 24,000 (6,048)     |
| <b>GAS INLET</b>   |                    |
| MDG model — in.  | 3/8 N.P.T.         |
| <b>AUTOMATIC PRESSURE REGULATOR</b>                        |                    |
| MDG models   | •                  |
| <b>ADJUSTABLE LEVELING LEGS</b>                            |                    |
| MDG models   | •                  |
| <b>APPROXIMATE WEIGHT</b>                                  |                    |
| Crated — lbs. (kg)   | 152 (69)           |
| Uncrated — lbs. (kg)                                       | 138 (62.6)         |

See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

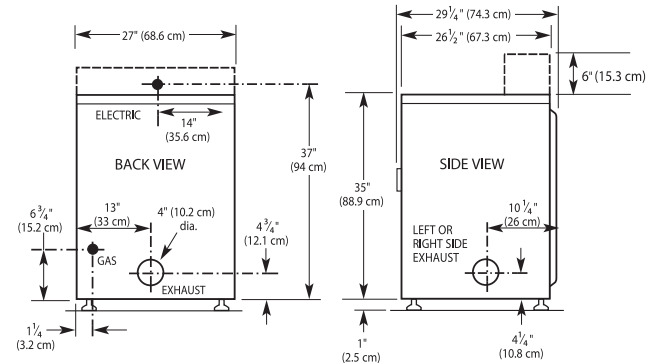

#### MAXIMUM EXHAUST DUCT LENGTH PER NUMBER OF TURNS

| Number Of 90° Turns | Rigid Metal Vent            |                   |
|---------------------|-----------------------------|-------------------|
|                     | Box Hood and Louvered Style | Angled Hood Style |
| 0                   | 135 ft. (41.2 m)            | 129 ft. (39.3 m)  |
| 1                   | 125 ft. (38.1 m)            | 119 ft. (36.3 m)  |
| 2                   | 115 ft. (35.1 m)            | 109 ft. (33.2 m)  |
| 3                   | 106 ft. (32.3 m)            | 100 ft. (30.5 m)  |
| 4                   | 98 ft. (29.9 m)             | 92 ft. (28.0 m)   |

| Number Of 90° Turns | Flexible Metal Vent         |                   |
|---------------------|-----------------------------|-------------------|
|                     | Box Hood and Louvered Style | Angled Hood Style |
| 0                   | 76 ft. (23.2 m)             | 62 ft. (18.9 m)   |
| 1                   | 71 ft. (21.6 m)             | 57 ft. (17.4 m)   |
| 2                   | 67 ft. (20.4 m)             | 53 ft. (16.2 m)   |
| 3                   | 65 ft. (19.8 m)             | 51 ft. (15.6 m)   |
| 4                   | 63 ft. (19.2 m)             | 49 ft. (14.9 m)   |



NEW YORK CITY M.E.A.



BEAB Approved



### 5 YEARS ON ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.